


SPECIFICATION

- ▲ 1、Electrical rating : DC 12V 3.8A
- 2、Contact resistance : < 20mΩ(initial)
- 3、Insulation resistance : > 1000MΩ(500VDC between open contacts)
- 4、Dielectric strength : >1500V 1 minute
- 5、Electrical life : 6000 cycles
- 6、Temperature rise at the terminal : Max.30°C
- 7、Solder ability of terminal : Max350°C,3S(no pressure may be placed in the terminals when soldering by hand)
- 8、Any Cd Pb Hg etc and it's compounds is not include in this product

PATENT NO. : M376887

- ▲ Packing: 1pcs/ per bag
- ▲ 包裝方式: 1PCS 一袋

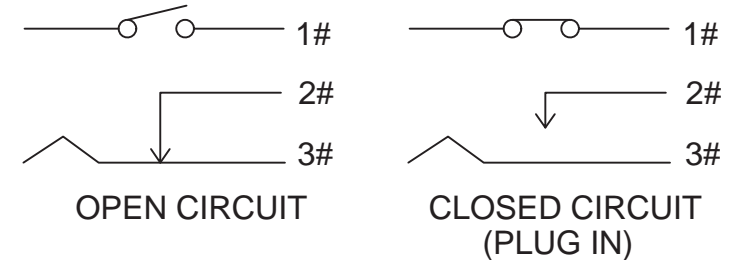

SCHMATIC

P. C. B LAYOUT
BOTTOM VIEW

JCJ INTERNATIONAL CO.,LTD

SCALE(比例): 2:1

TOLERANCE (公差):
0.00 mm ± 0.25mm
0.0 mm ± 0.40mm
ANGULAR: ± 5°
FILE NAME : RJ0020

| | | | | | |
|-------------------------|-----|-----------------------------|-----------------------|--------------------|--------|
| TITLE 圖名 | | DC POWER JACK WITH SWITCHES | | SIZE 圖紙 | A4 |
| DWG NO. 圖號 | | RJ-005-P001 | | UNIT 單位 | mm |
| REV. 版本 | A | DATE 日期 | JAN - 19 - 2018 | SHEET 張數 | 1 of 1 |
| CHECKED BY 審核 | 陳燈財 | | DRAWN BY 製圖 | IRENE | |

| | 符號 | 原尺寸 | 修改後尺寸 | 變更日期 |
|---|-----|-----|-------|------|
| 1 | (A) | | | |
| 2 | (B) | | | |
| 3 | (C) | | | |
| 4 | (D) | | | |
| 5 | (E) | | | |